

	Contains	m ²	ft ²	weight
1 pack Nordic Universal	4 planks	2,24m ²	24,10 ft ²	21,0 kg
1 pallet Nordic Universal	39 packs	87,33 m ²	940,03 ft ²	855,8 kg

Product specifications

Dimensions	2413 x 232 mm
Total thickness	10,2 mm
Bevels	4 micro
Loc System	NordLoc
Level of use according to European standard EN10874	23 heavy domestic use
	34 heavy commercial use
Residential warranty	lifetime
Commercial warranty	10 years


Warranty conditions on www.berryalloc.com.

Composition


Surface layer	AC6, High pressure laminate, impregnated with melamine and phenol resin
Substrate	Water resistant High Density Fiberboard (950 kg/m ³)
Backing	Engineered balancing foil

Test results

	Norm	Results
Abrasion resistance	EN 13329	AC6 (IP 8500)
Impact resistance	EN 13329	small ball : ≥ 120 mm - big ball ≥ 1600 mm)
Thickness swelling	ISO 24336	max. 8%
Water resistance	ISO 4760	lifetime (according to warranty conditions)
Fire resistance	EN 13501-1	Bfl -S1
Formaldehyde emission	EN 717-1	E1
Slip resistance	EN 13893 EN 16165:2021-10	DS WSOT : PTV WET 36+ MWG : PTV WET 25-35
Density	EN 323	950 kg/m ³
Resistance to staining	EN 438.2.26	5 (groups 1+2) ; 4 (group 3)
Effect of a furniture leg	EN 424	no damage (foot type 0)
Effect of a castor chair	EN 425	No damage or visible change in appearance at 25.000 rev. with hard wheels (type H)
Thermal resistance without integrated underlay	ISO 8302 (EN 12664 / EN12667)	0,072 m ² K/W – Suitable for floor heating/cooling. Detailed instructions on www.berryalloc.com .



What is a Nordic Universal made of?

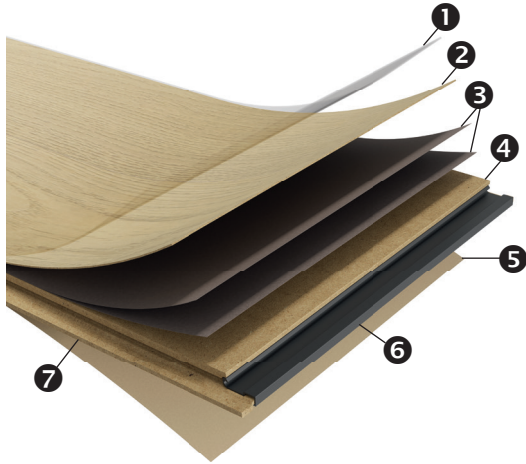

- ❶ AC6 overlay/Class 34
- ❷ Impregnated decor paper
- ❸ Impregnated Kraft paper (2 layers)
- ❹ Water resistant HDF board
- ❺ Counterbalance paper
- ❻ Short Side NordLoc
- ❼ Long Side DuoLoc